


Doigt de gant mécanosoudé à visser type TWV

Screw in fabricated thermowell type TWV

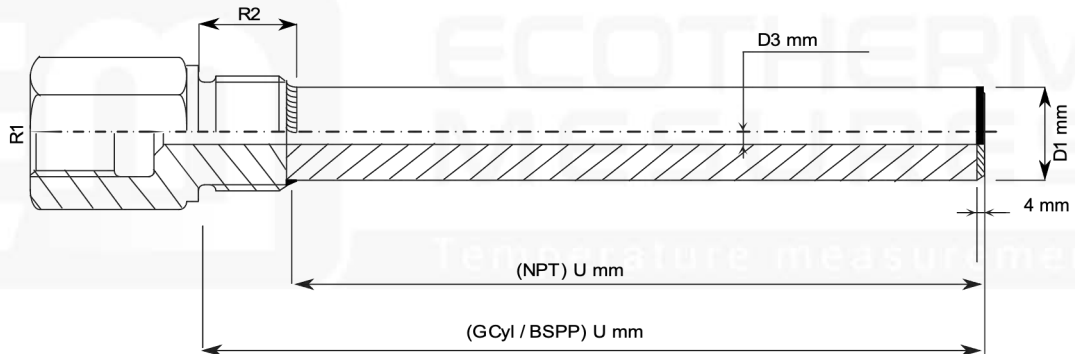

Raccordement instrumentation (R1)

Probe connection (R1)

- 1 1/2"GCyl
- 1/2"BSPP
- 2 1/2"NPT
- 7 3/4"GCyl
- 3/4"BSPP
- 8 3/4"NPT
- Z autre préciser
other on request

Nature gaine


Material sheath

- A acier inox 304L
- SS304
- B acier inox 316L
- SS316
- Z autre préciser
other on request

Longueur utile (U)

Useful length (U)

- 030 030 mm
- 080 080 mm
- 130 130 mm
- 280 280 mm
- ZZZ autre préciser
other on request

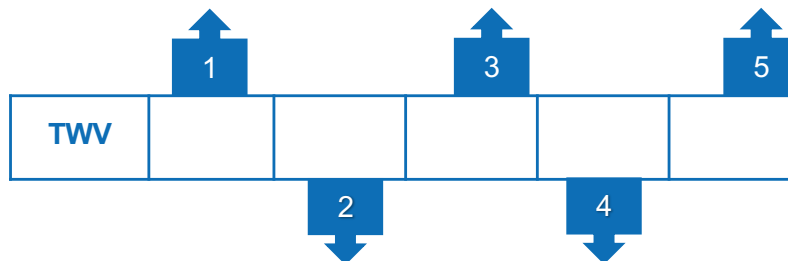

Raccordement procédé (R2)

Process connection (R2)

- 1 1/2"GCyl
- 1/2"BSPP
- 2 1/2"NPT
- 7 3/4"GCyl
- 3/4"BSPP
- 8 3/4"NPT
- Z autre préciser
other on request

Diamètre gaine (D1 x D3)

Sheath diameter (D1 x D3)

- 80 8 x 6 mm
- 90 9 x 7 mm
- 10 10 x 8 mm
- 12 12 x 10 mm
- 13 13,5 x 8,9 mm
- 21 21,3 x 16,7 mm
- ZZ autre préciser
other on request